




# Basic Object-Oriented Programming in Java

Originals of Slides and Source Code for Examples:

<http://courses.coreservlets.com/Course-Materials/java.html>

**Customized Java EE Training:** <http://courses.coreservlets.com/>

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android. Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

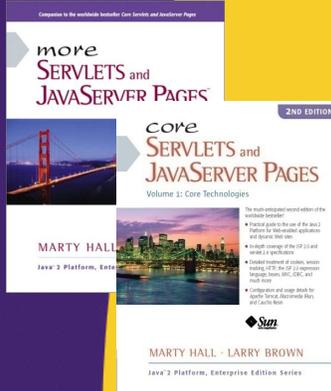

**For live Java EE training, please see training courses at <http://courses.coreservlets.com/>.**

**JSF 2.0, PrimeFaces, Servlets, JSP, Ajax (with jQuery), GWT, Android development, Java 6 and 7 programming, SOAP-based and RESTful Web Services, Spring, Hibernate/JPA, XML, Hadoop, and customized combinations of topics.**



**Taught by the author of *Core Servlets and JSP*, *More Servlets and JSP*, and this tutorial. Available at public venues, or customized versions can be held on-site at your organization. Contact [hall@coreservlets.com](mailto:hall@coreservlets.com) for details.**

# Topics in This Section

- **Similarities and differences between Java and C++**
- **Object-oriented nomenclature and conventions**
- **Instance variables (fields)**
- **Methods (member functions)**
- **Constructors**
- **Example with four variations**

“Object-oriented programming is an exceptionally bad idea which could only have originated in California.” -- Edsger Dijkstra, 1972 Turing Award winner.

4

© 2012 [Marty Hall](#)



# Basics

**Customized Java EE Training: <http://courses.coreservlets.com/>**

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android.

Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

5

# Object-Oriented Programming in Java

- **Similarities with C++**
  - User-defined classes can be used like built-in types.
  - Basic syntax
- **Differences from C++**
  - Methods (member functions) are the only function type
  - Object is the topmost ancestor for all classes
  - All methods use the run-time, not compile-time, types (i.e. all Java methods are like C++ virtual functions)
  - The types of all objects are known at run-time
  - All objects are allocated on the heap (always safe to return objects from methods)
  - Single inheritance only
- **Comparisons to C#**
  - C# very similar to Java in OOP. For details, see [http://www.harding.edu/fmccown/java1\\_5\\_csharp\\_comparison.html](http://www.harding.edu/fmccown/java1_5_csharp_comparison.html)

6

# Object-Oriented Nomenclature

- **“Class” means a category of things**
  - A class name can be used in Java as the type of a field or local variable or as the return type of a function (method)
- **“Object” means a particular item that belongs to a class**
  - Also called an “instance”
- **Example**

```
String s1 = "Hello";
```

  - Here, String is the class, and the variable s1 and the value "Hello" are objects (or “instances of the String class”)

7



# Instance Variables

Customized Java EE Training: <http://courses.coreservlets.com/>

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android.  
Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

8

## Overview

- **Definition**
  - Data that is stored inside an object. “Instance variables” can also be called “data members” or “fields”.
- **Syntax**

```
public class MyClass {  
    public SomeType field1, field2;  
}
```

In any class that also has methods, it is almost always better to declare instance variables private. We will show how and why in the next tutorial section.
- **Motivation**
  - Lets an object have persistent values.
    - It is often said that in OOP, objects have three characteristics: state, behavior, and identity. The instance variables provide the state.

9

# Ship Example 1: Instance Variables

```
public class Ship1 { (In Ship1.java)
    public double x, y, speed, direction;
    public String name;
}

public class Test1 { (In Test1.java)
    public static void main(String[] args) {
        Ship1 s1 = new Ship1();
        s1.x = 0.0;
        s1.y = 0.0;
        s1.speed = 1.0;
        s1.direction = 0.0; // East
        s1.name = "Ship1";
        Ship1 s2 = new Ship1();
        s2.x = 0.0;
        s2.y = 0.0;
        s2.speed = 2.0;
        s2.direction = 135.0; // Northwest
        s2.name = "Ship2";
        ...
    }
}
```

10

# Instance Variables: Example (Continued)

```
...
s1.x = s1.x + s1.speed
        * Math.cos(s1.direction * Math.PI / 180.0);
s1.y = s1.y + s1.speed
        * Math.sin(s1.direction * Math.PI / 180.0);
s2.x = s2.x + s2.speed
        * Math.cos(s2.direction * Math.PI / 180.0);
s2.y = s2.y + s2.speed
        * Math.sin(s2.direction * Math.PI / 180.0);
System.out.println(s1.name + " is at ("
                    + s1.x + "," + s1.y + ").");
System.out.println(s2.name + " is at ("
                    + s2.x + "," + s2.y + ").");
}
}
```

11

# Instance Variables: Results

- **Compiling and running in Eclipse**
  - Save Test1.java
  - R-click, Run As → Java Application
- **Compiling and running manually**

```
DOS> javac Test1.java  
DOS> java Test1
```

## Output:

```
Ship1 is at (1,0).  
Ship2 is at (-1.41421,1.41421).
```

12

# Example 1: Major Points

- **Java naming conventions**
- **Format of class definitions**
- **Creating classes with “new”**
- **Accessing fields with “variableName.fieldName”**

13

# Java Naming Conventions

- **Start classes with uppercase letters**

- Constructors (discussed later in this section) must exactly match class name, so they also start with uppercase letters

```
public class MyClass {  
    ...  
}
```

14

# Java Naming Conventions

- **Start other things with lowercase letters**

- Instance vars, local vars, methods, parameters to methods

```
public class MyClass {  
    public String firstName, lastName;  
  
    public String fullName() {  
        String name =  
            firstName + " " + lastName;  
        return name;  
    }  
}
```

15

# Objects and References

- Once a class is defined, you can declare variables (object reference) of that type

```
Ship s1, s2;  
Point start;  
Color blue;
```

- Object references are initially **null**
  - The **null** value is a distinct type in Java and is not equal to zero
  - A primitive data type (e.g., int) cannot be cast to an object (e.g., String), but there are some conversion wrappers
- The **new** operator is required to explicitly create the object that is referenced

```
ClassName variableName = new ClassName();
```

16

# Accessing Instance Variables

- Use a dot between the variable name and the field  
`variableName.fieldName`

- Example

- For example, Java has a built-in class called `Point` that has `x` and `y` fields

```
Point p = new Point(2, 3); // Build a Point object  
int xSquared = p.x * p.x; // xSquared is 4  
int xPlusY = p.x + p.y; // xPlusY is 5  
p.x = 7;  
xSquared = p.x * p.x; // Now xSquared is 49
```

- Exceptions

- Can access fields of current object without `varName`
  - See upcoming method examples
- It is conventional to make all instance variables private
  - In which case outside code can't access them directly. We will show later how to hook them to outside with methods.

17



# Methods

Customized Java EE Training: <http://courses.coreservlets.com/>

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android.  
Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

18

## Overview

- **Definition**
  - Functions that are defined inside a class. “Methods” can also be called “member functions”.
- **Syntax**

```
public class MyClass {  
    public ReturnType myMethod(...) { ... }  
}
```

If you want code that uses your class to access the method, make it public. If your method is called only by other methods in the same class, make it private. Make it private unless you have a specific reason to do otherwise.
- **Motivation**
  - Lets an object calculate values or do operations, usually based on its current state (instance variables).
    - It is often said that in OOP, objects have three characteristics: state, behavior, and identity. The methods provide the behavior.

19

## Ship Example 2: Methods

```
public class Ship2 { (In Ship2.java)
    public double x=0.0, y=0.0, speed=1.0, direction=0.0;
    public String name = "UnnamedShip";

    private double degreesToRadians(double degrees) {
        return(degrees * Math.PI / 180.0);
    }

    public void move() {
        double angle = degreesToRadians(direction);
        x = x + speed * Math.cos(angle);
        y = y + speed * Math.sin(angle);
    }

    public void printLocation() {
        System.out.println(name + " is at ("
            + x + ", " + y + ").");
    }
}
```

20

## Methods (Continued)

```
public class Test2 { (In Test2.java)
    public static void main(String[] args) {
        Ship2 s1 = new Ship2();
        s1.name = "Ship1";
        Ship2 s2 = new Ship2();
        s2.direction = 135.0; // Northwest
        s2.speed = 2.0;
        s2.name = "Ship2";
        s1.move();
        s2.move();
        s1.printLocation();
        s2.printLocation();
    }
}
```

- **Compiling and Running: (R-click, Run As in Eclipse)**

```
javac Test2.java
java Test2
```

- **Output:**

```
Ship1 is at (1,0).
Ship2 is at (-1.41421,1.41421).
```

21

## Example 2: Major Points

- Format of method definitions
- Methods that access local fields
- Calling methods
- Static methods
- Default values for fields
- public/private distinction

22

## Defining Methods (Functions Inside Classes)

- Basic method declaration:

```
public ReturnType methodName (Type1 arg1,  
                             Type2 arg2, ...) {  
    ...  
    return (somethingOfReturnType) ;  
}
```

- Exception to this format: if you declare the return type as `void`
  - This special syntax that means “this method isn’t going to return a value – it is just going to do some side effect like printing on the screen”
  - In such a case you do not need (in fact, are not permitted), a **return** statement that includes a value to be returned

23

# Examples of Defining Methods

- **Here are two examples:**
  - The first squares an integer
  - The second returns the faster of two **Ship** objects, assuming that a class called **Ship** has been defined that has a field named **speed**

```
// Example function call:  
// int val = square(7);  
  
public int square(int x) {  
    return(x*x);  
}  
  
// Example function call:  
// Ship faster = fasterShip(someShip, someOtherShip);  
  
public Ship fasterShip(Ship ship1, Ship ship2) {  
    if (ship1.speed > ship2.speed) {  
        return(ship1);  
    } else {  
        return(ship2);  
    }  
}
```

24

# Calling Methods

- **The term “method” means “function associated with an object” (I.e., “member function”)**
  - The usual way that you call a method is by doing the following:

```
variableName.methodName (argumentsToMethod) ;
```

- **For example, the built-in `String` class has a method called `toUpperCase` that returns an uppercase variation of a `String`**
  - This method doesn't take any arguments, so you just put empty parentheses after the function (method) name.

```
String s1 = "Hello";  
String s2 = s1.toUpperCase(); // s2 is now "HELLO"
```

25

# Accessing External and Internal Methods

- **Accessing methods in other classes**
  - Get an object that refers to instance of other class
    - `Ship s = new Ship();`
  - Call method on that object
    - `s.move();`
- **Accessing instance vars in same class**
  - Call method directly (no variable name and dot in front)
    - `move();`
    - `double d = degreesToRadians();`
      - For local methods, you can use a variable name if you want, and Java automatically defines one called “this” for that purpose. See constructors section.
- **Accessing static methods**
  - Use `ClassName.methodName(args)`
    - `double d = Math.cos(Math.PI/2);`

26

# Calling Methods (Continued)

- **There are two exceptions to requiring a variable name for a method call**
  - Calling a method defined inside the current class definition
    - Use “`methodName(args)`” instead of “`varName.methodName(args)`”
  - Functions (methods) that are declared “`static`”
    - Use “`ClassName.methodName(args)`”
- **Calling a method of the current class**
  - You don’t need the variable name and the dot
  - For example, a `ship` class might define a method called `degreesToRadians`, then, within another function in the same class definition, do this:
    - ```
double angle = degreesToRadians(direction);
```
    - No variable name and dot is required in front of `degreesToRadians` since it is defined in the same class as the method that is calling it

27

# Static Methods

- **Also “class methods” (vs. “instance methods”)**
  - Static functions do not access any non-static methods or fields within their class and are almost like global functions in other languages
- **You call a static method through the class name**  
`ClassName.functionName(arguments);`
  - For example, the **Math** class has a static method called **cos** that expects a **double** precision number as an argument
    - So you can call **Math.cos(3.5)** without ever having any object (instance) of the **Math** class
- **Note on the main method**
  - Since the system calls **main** without first creating an object, **static** methods are the only type of methods that **main** can call directly (i.e. without building an object and calling the method of that object)

28

# Method Visibility

- **public/private distinction**
  - A declaration of **private** means that “outside” methods can’t call it – only methods within the same class can
    - Thus, for example, the **main** method of the **Test2** class could not have done  
`double x = s1.degreesToRadians(2.2);`
      - Attempting to do so would have resulted in an error at compile time
  - Only say **public** for methods that you *want to guarantee your class will make available to users*
  - You are free to change or eliminate private methods without telling users of your class
- **private instance variables**
  - In next lecture, we will see that you almost always make instance vars private and use methods to access them

29

# Declaring Variables in Methods

- **Format**

- When you declare a local variable inside of a method, the normal declaration syntax looks like:

```
Type varName = value;
```

- **The value part can be:**

- A constant
- Another variable
- A function (method) call
- A constructor invocation (a special type of function prefaced by **new** that builds an object)
- Some special syntax that builds an object without explicitly calling a constructor (e.g., strings)

30

# Declaring Variables in Methods: Examples

```
int x = 3;
int y = x;

// Special syntax for building a String object
String s1 = "Hello";

// Building an object the normal way
String s2 = new String("Goodbye");

String s3 = s2;
String s4 = s3.toUpperCase(); // Result: s4 is "GOODBYE"

// Assume you defined a findFastestShip method that
// returns a Ship
Ship ship1 = new Ship();
Ship ship2 = ship1;
Ship ship3 = findFastestShip();
```

31



# Constructors

Customized Java EE Training: <http://courses.coreservlets.com/>

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android.  
Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

32

## Overview

- **Definition**
  - Code that gets executed when “new” is called
- **Syntax**
  - “Method” that exactly matches the class name and has no return type (not even void).

```
public class MyClass {  
    public MyClass(...) { ... }  
}
```
- **Motivation**
  - Lets you build an instance of the class, and assign values to instance variables, all in one fell swoop
  - Lets you enforce that all instances have certain properties
  - Lets you run side effects when class is instantiated

33

# Example: No User-Defined Constructor

- **Person**

```
public class Person1 {  
    public String firstName, lastName;  
}
```

- **PersonTest**

```
public class Person1Test {  
    public static void main(String[] args) {  
        Person1 p = new Person1();  
        p.firstName = "Larry";  
        p.lastName = "Ellison";  
        // doSomethingWith(p);  
    }  
}
```

It took three lines of code to make a properly constructed person. It would be possible for a programmer to build a person and forget to assign a first or last name.

34

# Example: User-Defined Constructor

- **Person**

```
public class Person2 {  
    public String firstName, lastName;  
  
    public Person2(String initialFirstName,  
                   String initialLastName) {  
        firstName = initialFirstName;  
        lastName = initialLastName;  
    }  
}
```

- **PersonTest**

```
public class Person2Test {  
    public static void main(String[] args) {  
        Person2 p = new Person2("Larry", "Page");  
        // doSomethingWith(p);  
    }  
}
```

It took one line of code to make a properly constructed person. It would not be possible for a programmer to build a person and forget to assign a first or last name.

35

# Ship Example 3: Constructors

```
public class Ship3 { (In Ship3.java)
    public double x, y, speed, direction;
    public String name;

    public Ship3(double x, double y,
                 double speed, double direction,
                 String name) {
        this.x = x; // "this" differentiates instance vars
        this.y = y; // from local vars.
        this.speed = speed;
        this.direction = direction;
        this.name = name;
    }

    private double degreesToRadians(double degrees) {
        return(degrees * Math.PI / 180.0);
    }
    ...
}
```

36

# Constructors (Continued)

```
    public void move() {
        double angle = degreesToRadians(direction);
        x = x + speed * Math.cos(angle);
        y = y + speed * Math.sin(angle);
    }
    public void printLocation() {
        System.out.println(name + " is at ("
                            + x + ", " + y + ").");
    }
}

public class Test3 { (In Test3.java)
    public static void main(String[] args) {
        Ship3 s1 = new Ship3(0.0, 0.0, 1.0, 0.0, "Ship1");
        Ship3 s2 = new Ship3(0.0, 0.0, 2.0, 135.0, "Ship2");
        s1.move();
        s2.move();
        s1.printLocation();
        s2.printLocation();
    }
}
```

37

## Constructor Example: Results

- **Compiling and running in Eclipse**

- Save Test3.java
- R-click, Run As → Java Application

- **Compiling and running manually**

```
DOS> javac Test3.java  
DOS> java Test3
```

- **Output**

```
Ship1 is at (1,0).  
Ship2 is at (-1.41421,1.41421).
```

38

## Example 3: Major Points

- **Format of constructor definitions**
- **The “this” reference**
- **Destructors (not!)**

39

# Constructors

- **Constructors are special functions called when a class is created with `new`**

- Constructors are especially useful for supplying values of fields
- Constructors are declared through:

```
public ClassName(args) {  
    ...  
}
```

- Notice that the **constructor name must exactly match the class name**
- Constructors have **no return type** (not even `void`), unlike a regular method
- Java automatically provides a zero-argument constructor if and only if the class doesn't define its own constructor

- That's why you could say

```
Ship1 s1 = new Ship1();
```

in the first example, even though a constructor was never defined

40

# The `this` Variable

- **The `this` object reference can be used inside any non-static method to refer to the current object**
- **The common uses of the `this` reference are:**

1. To pass a reference to the current object as a parameter to other methods

```
someMethod(this);
```

2. To resolve name conflicts
  - Using `this` permits the use of instance variables in methods that have local variables with the same name

- Note that it is only necessary to say `this.fieldName` when you have a local variable and a class field with the same name; otherwise just use `fieldName` with no `this`

41

# Destructors

*This Page Intentionally Left Blank*

42

© 2012 Marty Hall



## Example: Person Class

**Customized Java EE Training: <http://courses.coreservlets.com/>**

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android.  
Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

43

# Idea

- **Goal**
  - Make a class to represent a person's first and last name
- **Approach: 4 iterations**
  - Person with instance variables only
    - And test case
  - Add a getFullName method
    - And test case
  - Add a constructor
    - And test case
  - Change constructor to use "this" variable
    - And test case
    - Also have test case make a Person[]

44

# Iteration 1: Instance Variables

## Person.java

```
public class Person {  
    public String firstName, lastName;  
}
```

## PersonTest.java

```
public class PersonTest {  
    public static void main(String[] args) {  
        Person p = new Person();  
        p.firstName = "Larry";  
        p.lastName = "Ellison";  
        System.out.println("Person's first name: " +  
            p.firstName);  
        System.out.println("Person's last name: " +  
            p.lastName);  
    }  
}
```

45

## Iteration 2: Methods

### Person.java

```
public class Person {
    public String firstName, lastName;

    public String getFullName() {
        return(firstName + " " + lastName);
    }
}
```

### PersonTest.java

```
public class PersonTest {
    public static void main(String[] args) {
        Person p = new Person();
        p.firstName = "Bill";
        p.lastName = "Gates";
        System.out.println("Person's full name: " +
            p.getFullName());
    }
}
```

46

## Iteration 3: Constructors

### Person.java

```
public class Person {
    public String firstName, lastName;

    public Person(String initialFirstName,
        String initialLastName) {
        firstName = initialFirstName;
        lastName = initialLastName;
    }

    public String getFullName() {
        return(firstName + " " + lastName);
    }
}
```

### PersonTest.java

```
public class PersonTest {
    public static void main(String[] args) {
        Person p = new Person("Larry", "Page");
        System.out.println("Person's full name: " +
            p.getFullName());
    }
}
```

47

# Iteration 4: Constructors with the “this” Variable (and Arrays)

## Person.java

```
public class Person {
    public String firstName, lastName;

    public Person(String firstName,
                  String lastName) {
        this.firstName = firstName;
        this.lastName = lastName;
    }

    public String getFullName() {
        return(firstName + " " + lastName);
    }
}
```

## PersonTest.java

```
public class PersonTest {
    public static void main(String[] args) {
        Person[] people = new Person[20];
        for(int i=0; i<people.length; i++) {
            people[i] =
                new Person(NameUtils.randomFirstName(),
                          NameUtils.randomLastName());
        }
        for(Person person: people) {
            System.out.println("Person's full name: " +
                               person.getFullName());
        }
    }
}
```

48

# Helper Class for Iteration 4

```
public class NameUtils {
    public static String randomFirstName() {
        int num = (int) (Math.random()*1000);
        return("John" + num);
    }

    public static String randomLastName() {
        int num = (int) (Math.random()*1000);
        return("Smith" + num);
    }
}
```

49

# To Do: Later Iterations

- **Use accessor methods**
  - Make instance variables private and use `getFirstName`, `setFirstName`, `getLastName`, `setLastName`
- **Document code with JavaDoc**
  - Add JavaDoc-style comments so that online API for Person class will be useful
- **Use inheritance**
  - Make a class (Employee) based on the Person class. Don't repeat the code from the Person class.
- **Next lecture**
  - Covers all of these ideas, then shows updated code

50

© 2012 Marty Hall



# Wrap-Up

Customized Java EE Training: <http://courses.coreservlets.com/>

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android.

Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

51

# Summary

- **Conventions**

- Class names start with upper case
- Method names and variable names start with lower case
- Indent nested blocks consistently

- **Example class**

```
public class Circle {  
    public double radius; // We'll make this private next lecture  
    public Circle(double radius) { this.radius = radius; }  
    public double getArea() { return(Math.PI*radius*radius); }  
}
```

- **Example usage**

```
Circle c1 = new Circle(10.0);  
double area = c1.getArea();
```

52

© 2012 Marty Hall



## Questions?

[JSF 2, PrimeFaces, Java 7, Ajax, jQuery, Hadoop, RESTful Web Services, Android, Spring, Hibernate, Servlets, JSP, GWT, and other Java EE training.](#)

**Customized Java EE Training: <http://courses.coreservlets.com/>**

Java, JSF 2, PrimeFaces, Servlets, JSP, Ajax, jQuery, Spring, Hibernate, RESTful Web Services, Hadoop, Android.

Developed and taught by well-known author and developer. At public venues or onsite at *your* location.

53