

(antihong@tt.co.kr)

Paros

paros


가

(<http://www.parosproxy.org/>)

HTTP HTTPS

cookies form

가

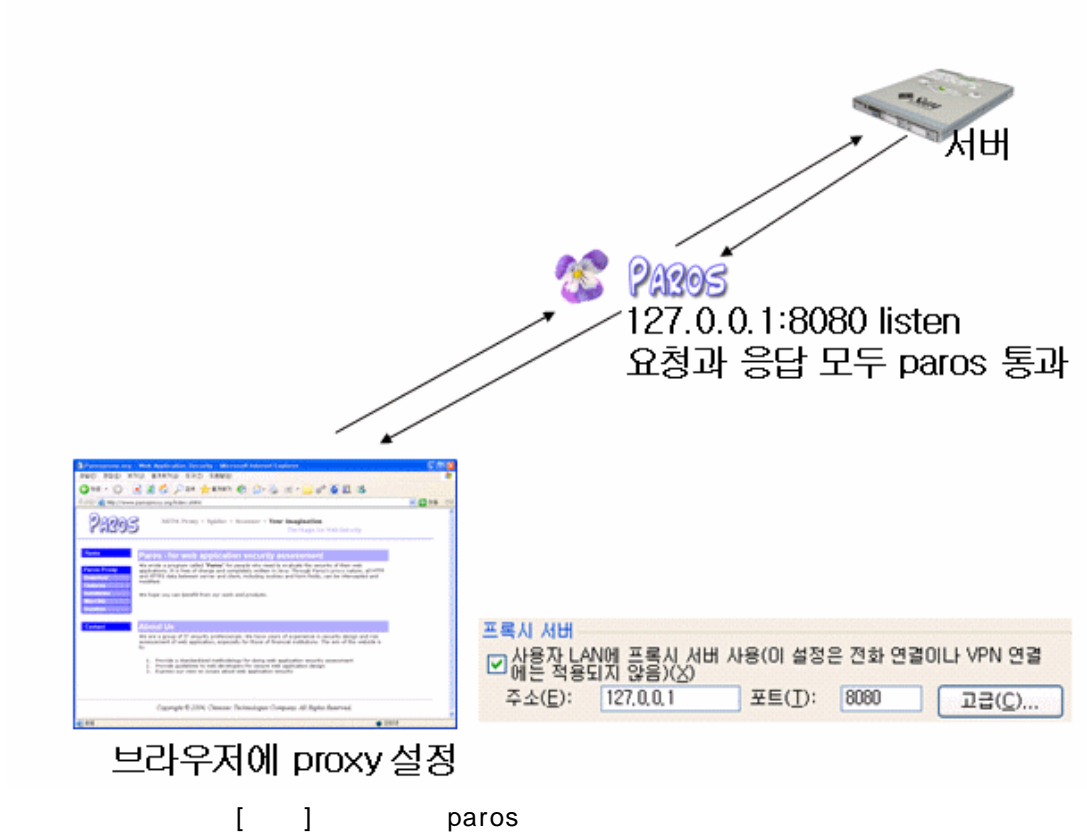

paros

- . GUI
- . tree
- . scanner 가
- . HTTPS 가
- . HASH encoding / decoding

1.4 JRE(Java Run Time Enviroment)가

<http://java.sun.com/j2se/>

paros

(paros-x.x.x-win.exe)

가

, paros

127.0.0.1 8080

8080

paros

->

->

->


LAN

“

”

“127.0.0.1” ,

“8080”

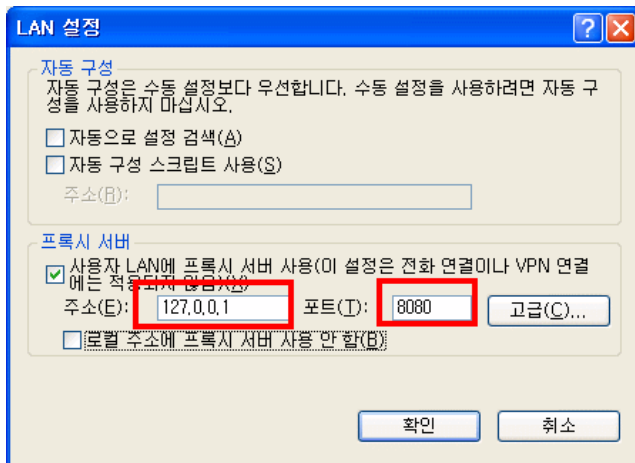

[]

127.0.0.1 8080

paros

paros

. proxy

Sites

GET POST

가

GET POST

HTTP Header

가


Request Response

, Response

Request

(200 OK

)

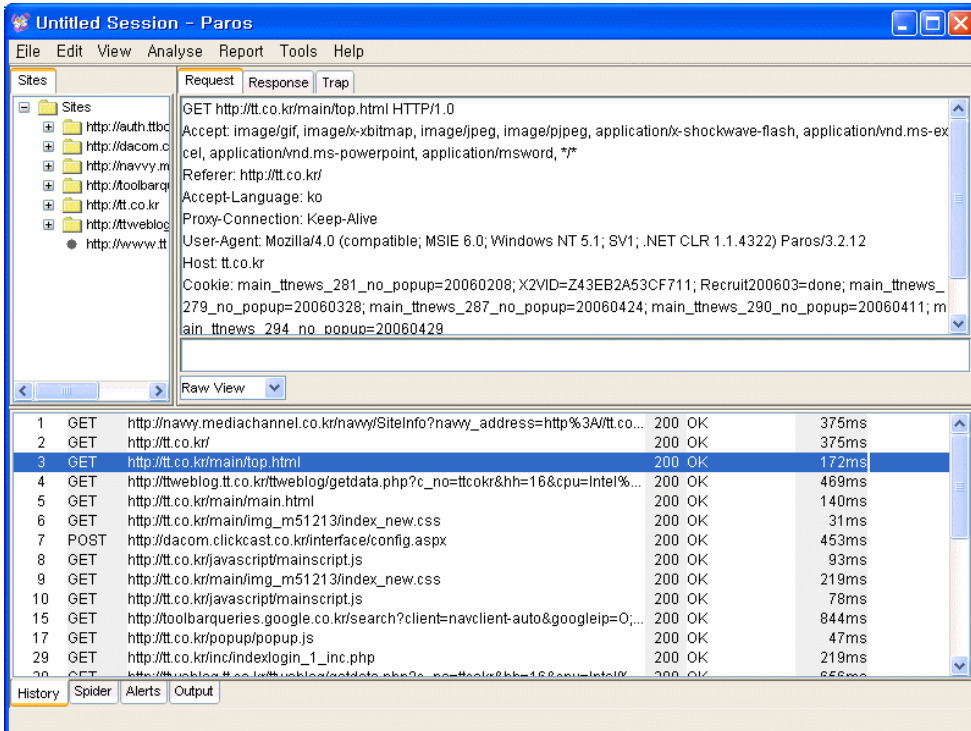


[] paros

Request

, Scan

Scan

가

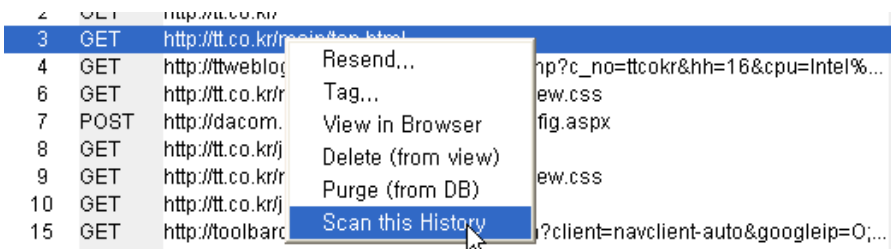

[] Scan

Report -> Last Scan Report

HTML

Tools > Encoder Hash


Encode/ Decode

Hash

encoding

hash

가

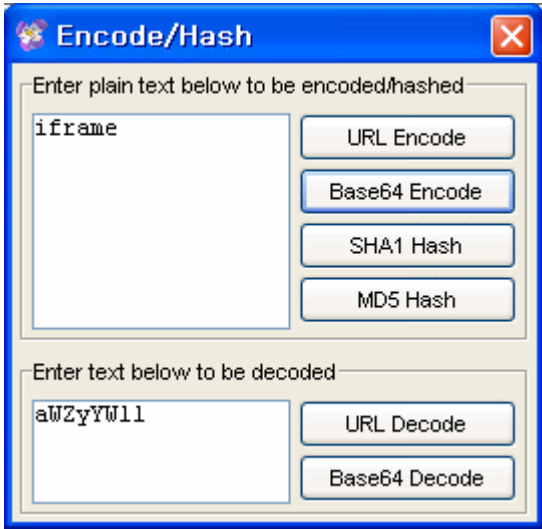

[] encode/hash

Cookie injection


Tools > Manual Request Editor

가 가 , id/pw admin / ' or 1=1 -- sql injection , Request

Send

가 가

(Server Side)

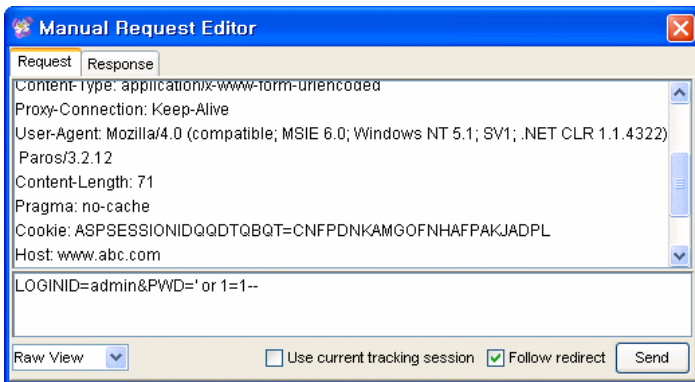

[] Manual Request Editor

Session Cookies
 가 가 . Request Cookie ID admin
 Send ID
 Tools > Options Filters User-Agent